
2025/10/17 07:20 1/10 PMIP4 and the CMIP6 DRS


PMIP4 and the CMIP6 DRS



All the *attributes* have to be defined properly when creating data for the CMIP6 database, but you will find below details about some attributes that are especially relevant for PMIP4

Some key concepts...







 DRS = Data Reference Syntax: the DRS is used to identify experiments, simulations, ensembles of experiments, atomic datasets and is used, for example, in file names, directory structures, the further_info_url, and in facets of some search tools

Example: the experiment_id **attribute** is used in the **DRS**, and its value has to be chosen from a **CV** ([piControl, past1000, lgm, ...])

CMIP6 official specifications

The following CMIP6 document is still *in prep* (as of July 14th 2016)



This document specifies all the global attributes that are defined for CMIP6. It also indicates how a subset of those relate to the Data Reference Syntax (DRS) and are used in file names and directory structures. Controlled vocabularies are defined for some global attributes (e.g., source_type and grid resolution).

• **CMIP6** document: CMIP6 Global Attributes, DRS, Filenames, Directory Structure, and CV's (version 1.0)

- Legacy CMIP5 documents:
 - CMIP5 Data Reference Syntax (DRS) and Controlled Vocabularies (Version 1.3.1 13 June 2012)
 - CMIP5 Model Output Requirements: File Contents and Format, Data Structure and Metadata (7 January 2010)

Project identification attributes

- activity id = activity labels
- mip era = activity's associated CMIP cycle
- Note: The project_id used in CMIP5 is being replaced in CMIP6 with two global attributes: 1) an
 activity_id, and 2) a mip_era (a label indicating the cycle of CMIP that this activity falls under
 which will be set to "CMIP6" for the 6th CMIP cycle). In a few cases it may be appropriate to
 include multiple activities in the activity_id (with multiple activities allowed, separated by single
 spaces). An example of this is "LUMIP AerChemMIP" for one of the land-use change
 experiments.


Project	activity_id	mip_era	Note
CMIP6	CMIP	CMIP6	
PMIP4-CMIP6	CMIP "CMIP PMIP"??	CMIP6	Should we use CMIP or "CMIP PMIP" for PMIP4 experiments that are part of CMIP6? This is confusing
PMIP4	PMIP	PMIP4::	Use this for non-CMIP6 experiments, or groups that are not part of CMIP6
			Should we use <i>PMIP4</i> because it is the 4th phase of PMIP, or <i>CMIP6</i> because we will be using CMIP6 format specifications?

Experiment names

You can find all the referenced experiment names on es-doc search site: select Project=CMIP6-DRAFT and Type=Experiment

- experiment id = root experiment identifier
- experiment = short expt. description
- sub_experiment_id=none ⇒ needed for CMIP6 hindcast and forecast experiments to indicate "start year". For other experiments, this should be set to none
- sub_experiment=none ⇒ needed for CMIP6 hindcast and forecast experiments. For other experiments, this should be set to none

DECK and historical experiments

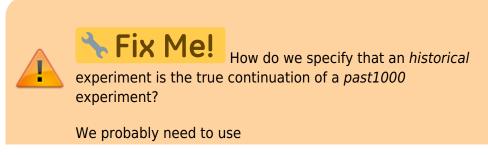

2025/10/17 07:20 3/10 PMIP4 and the CMIP6 DRS



parent_experiment_id=past1000 in the files' metadata, as well as parent_activity_id, parent_mip_era=CMIP6, parent_source_id, branch_time_in_ parent and other related parent_* variables. We can probably also agree on a specific variant_label that will appear in the file names.

experiment_id	experiment
amip	Atmospheric Model Intercomparison Project
piControl	Pre-Industrial Control
abrupt-4xCO2	abrupt quadrupling of CO2
1pctCO2	1 percent per year increase in CO2
historical	all-forcing simulation of the recent past

PMIP4-CMIP6 experiments

You can find specific details about the experiments by visiting the PMIP4 experimental design section, or by directly clicking on one of the experiments below

experiment_id	experiment
past1000	past 1000 years
mid-Holocene	mid-Holocene
lgm	last glacial maximum
lig127k	last interglacial
midPliocene-eoi400	mid-Pliocene

PMIP4 only experiments

Guidelines for creating new PMIP4 experiment id values

- Allowed characters: CMIP6 experiment_id values are similar to CMIP5 (...so the permitted characters will be: a-z, A-Z, 0-9, and "-"), but a compound structure is allowed (segments separated by hyphens; e.g., "abrupt-4xCO2"); in a few cases multiple sub-experiments will be defined belonging to this root and constituting an ensemble.
- Being wise when creating/proposing a new name
 - Global attributes that label experiments are needed to construct file names and directories and can generally be used as search facets. Together, they should have the following characteristics:
 - * Uniquely label each experiment within CMIP6 and distinguish experiments with specified conditions that differ in any way
 - * Easily be interpreted and remembered
 - * Facilitate representations of groups of experiments that are closely related (e.g., same forecast conditions but different start dates, or experiment with an "offline" model driven by

output from various models)

- Planning for groups of related simulations
 - often several simulations will be performed that satisfy the conditions specified for each experiment. For example simulations of the historical period can branch from various points in a control run, and each of these will satisfy the conditions defining the experiment. Together such simulations constitute a "conforming ensemble" with member all satisfying the same "root" experiment specifications. There are also occasional cases where the experiment designers (MIP leaders) define a family of related simulations and choose to label these with a common "root" experiment name. An example of this is the set of decadal prediction hindcasts that are all run similarly but started from different start dates (with each simulation identified by a Such "defined ensembles" of different sub-experiment label). experiments will be labeled with a "root" experiment name, and a "sub-experiment id" will be used to distinguish among members in the ensemble.
 - Ensemble of simulations usually share a common experiment_id and have different ripf variant labels.

Proposed PMIP4 experiment_id values



The following suggested PMIP4 experiment_id values should be considered as a *work in progress*, till they are validated!

You can find specific details about the experiments by visiting the PMIP4 experimental design section, or by directly clicking on one of the experiments below

experiment_id	experiment	Status
LDv1-LGMspin	Last Glacial Maximum spinup	Work
LDv1-transpin	Transient orbit and trace gases spinup (26-21 ka)	Work
LDv1	Transient deglaciation (21-0 ka)	Work

Handling groups of simulations

CMIP5 ensemble member

aka r<N>i<M>p<L> or rip



2025/10/17 07:20 5/10 PMIP4 and the CMIP6 DRS

The definitions below have been superseded by CMIP6 specifications, but it is still useful to remember them. They have been copied from:



- a) CMIP5 Data Reference Syntax (DRS) and Controlled Vocabularies (Version 1.3.1 13 June 2012)
- b) CMIP5 Model Output Requirements: File Contents and Format, Data Structure and Metadata (7 January 2010)
- b) ⇒ realization = an integer (≥1) distinguishing among members of an ensemble of simulations (e.g., 1, 2, 3, etc.). If only a single simulation was performed, then it is recommended that realization=1.
 - For fields appearing in table "fx" in the CMIP5 Requested Output, set realization=0 (violating the general rule that it should be a positive definite integer).
 - Note that if two different simulations were started from the same initial conditions, the same realization number should be used for both simulations. For example if a historical run with "natural forcing" only and another historical run that includes anthropogenic forcing were initiated from the same point in a control run, both should be assigned the same realization. Also, each so-called RCP (future scenario) simulation should normally be assigned the same realization integer as the historical run from which it was initiated. This will allow users to easily splice together the appropriate historical and future runs. A similar convention should be followed, when appropriate, with other simulations (e.g., the decadal simulations). Note that the realization can be used in constructing the "ensemble member" called for by the DRS document; it is the value of **N** in **r<N>**i<M>p<L>.

[Note that for the "Transpose AMIP" project, the "realization" number is used to distinguish among the 16 members of each of 4 suites of runs (i.e., the 4 "seasons") generated from different observed conditions, spaced 30 hours apart. So, for example, the 16-member ensemble of runs initialized at 00Z on 15 Oct 2008, 06Z 16 Oct 2008, 12Z 17 Oct 2008, and so-on, would be assigned "r1", "r2", "r3", etc.]

- b) ⇒ initialization_method = an integer (≥1) referring to the initialization method used or different observational datasets used to initialize.
 - If only a single method and dataset was used to initialize the model, then this argument should normally be given the value 1.
 - For fields appearing in table "fx" in the CMIP5 Requested Output, set initialization_method=0 (violating the general rule that it should be a positive definite integer).
 - See the DRS document for guidance on assigning initialization_method. Note that the initialization_method is used in constructing the "ensemble member" called for in the DRS document; it is the value of \mathbf{M} in $r < N > \mathbf{i} < \mathbf{M} > p < L >$.
- b) ⇒ physics_version = an integer (≥1) referring to the physics version used by the model If there is only one physics version of the model, then this argument should be normally given the value 1.
 - Note that model versions that are substantially different should be given a different "model_id"; assigning a different "physics_version" should be reserved for closely-related model versions (e.g., as in a "perturbed physics" ensemble) or for the same model, but with different forcing or feedbacks active. In CMIP5, one would distinguish, for example, among runs forced by different combinations of "forcing" agents (as called for under the "historicalMisc" experiment experiment 7.3) by assigning different values to physics_version.
 - For fields appearing in table "fx" in the CMIP5 Requested Output, set physics_version=0

(violating the general rule that it should be a positive definite integer). Note that the physics_version is used in constructing the "ensemble member" called for by the DRS document; it is the value of $\bf L$ in r < N > i < M > p < L >

• a) ⇒ Ensemble member (r<N>i<M>p<L>) =

This triad of integers (N, M, L), formatted as

shown above (e.g., "r3i1p21") distinguishes among closely related simulations by a single model. All three are required even if only a single simulation is performed. The so-called "realization" number (a positive integer value of "N") is used to distinguish among members of an ensemble typically generated by initializing a set of runs with different, but equally realistic, initial conditions. CMIP5 historical runs initialized from different times of a control run, for example, would be identified by "r1", "r2", "r3", etc.). The data supplier must assign a realization number to each atomic dataset. It is generally recommended that the numbers be assigned sequentially starting with 1 (but other recommendations, specified below, may override this recommendation). In CMIP5, time-independent variables (i.e., those with frequency="fx") are not expected to differ across ensemble members, so for these N should be invariably assigned the value zero ("r0"). For TAMIP ("the Transpose AMIP activity), the "realization" number is used to distinguish among the 16 members of each of 4 ensembles (one

for each of 4 "seasons") generated from different observed conditions, spaced 30 hours apart.

So, for example, the 16-member ensemble of runs initialized at 00Z on 15 Oct 2008, 06Z 16 Oct

2008, 12Z 17 Oct 2008, and so-on, would be assigned "r1", "r2", "r3", etc.

Models used for forecasts that depend on the initial conditions might be initialized from

observations using different methods or different observational datasets. These should be

distinguished by assigning different positive integer values of "M" in the "initialization method

indicator" (i<M>). For CMIP5 this indicator might in some cases be needed to distinguish

among runs in the decadal-prediction suite of experiments (1.1-1.6). The data supplier must

assign an initialization method number to each atomic dataset. It is recommended that the

numbers be assigned sequentially starting with 1. In CMIP5, time-independent variables (i.e.,

6

those with frequency="fx") are not expected to differ across ensemble members, so for these M

should invariably be assigned the value zero ("i0"). A key (i.e., a table) should be made

available that associates each value of M with a particular initialization method and/or observational dataset.

If there are many closely related model versions, which, as a group, are generally referred to as a

perturbed physics ensemble (e.g., QUMP or climateprediction.net ensembles), then these should

be distinguishable by a "perturbed physics" number, p<L>, where the positive integer value of L

is uniquely associated with a particular set of model parameters (e.g., r3i1p78 is a third

realization of the seventy-eighth version of the perturbed physics model). If there are different

"forcing" combinations prescribed in experiment 7.3 in CMIP5 (the "historicalMisc" runs), then

each of these different runs are also assigned different values of L (in "p<L>"). Note that the

data supplier must assign a physics version number to each atomic dataset. It is recommended

that the numbers be assigned sequentially starting with 1. In CMIP5, time-independent variables

(i.e., those with frequency="fx") are not expected to differ across ensemble members, so for

these L should always be assigned the value zero ("p0"). A key (i.e., a table) should be made

available that associates each value of L with a particular set of model parameter values and/or,

in the case of the "historicalMisc" experiment, a particular suite of "forcing" agents.

Note that for a single model and experiment N, M, and L should be interpretable independently;

for all members of the ensemble, the correspondence between the values of N, M, and L and the $\frac{1}{2}$

simulation characteristics they represent should be consistent. For example the two different

ensemble members, r3i1p7 and r3i1p8, should both be initialized from exactly the same initial

conditions using the same method (because the "r" and "i" values are identical) although the

subsequent evolution of the simulations will presumably differ since they were produced by two

different "perturbed physics" versions of the same model. Note that

```
there may be cases where
"gaps" could occur in the list of ensemble members. If, for example,
two different initialization
procedures were used, but the second procedure was tested with only a
subset of the initial
condition cases of the first procedure (say, every other case). Then
the list of ensemble members
would look like: r1i1p1, r2i1p1 r3i1p1, r4i1p1, r5i1p1, r6i1p1, ...,
r1i2p1, r3i2p1, r5i2p1, ...
A recommendation for CMIP5 is that each so-called RCP (future scenario)
simulation should
when possible be assigned the same realization integer as the
historical run from which it was
initiated. This will allow users to easily splice together the
appropriate historical and future runs.
Thus, for example, suppose a 3-member ensemble of historical runs of a
model exists, and a
single rcp45 simulation was produced, initialized from the third member
of the historical
ensemble. The recp45 simulation would be designated "r3" (rather than
"r1"), even though it is
the only existing ensemble member, in order to indicate that it was
spawned from member 3 of
the historical ensemble. A similar convention should be followed, when
appropriate, with other
simulations (e.g., the decadal simulations).
```

CMIP6 variant label

aka r<k>i<l>p<m>f<n> or ripf

- realization index = realization number (integer >0)
- initialization index = index for variant of initialization method (integer > 0)
- physics index = index for model physics variant (integer >0)
- forcing_index = index for variant of forcing (integer >0)
 - Note: the information stored in the forcing attribute in CMIP5 may in CMIP6 appear in the variant info attribute
- variant_label = a label constructed from 4 indices stored as global attributes

- variant info = brief description of what is unique about this ripf variant
 - Example: "forcing: black carbon aerosol only", "realization 1", "realization 1; initialized

2025/10/17 07:20 9/10 PMIP4 and the CMIP6 DRS

using anomaly approach (method 2)"

PMIP4 and variant label notes

$realization_index$

The long PMIP4 simulations are going to require both a lot of processing power and a lot of storage. It is quite likely that there will be **only one realization**, for a given set of i < l > p < m > f < n > and that the variant label will always start with: r1

forcing_index

Depending on available resources, the PMIP4 groups may choose to perform several simulations for the same experiment, using different combinations of forcings. The forcings used will have to be carefully described in the documentation (and in the metadata inside each NetCDF file) and be *encoded* in the integer value of the forcing index.

Recommended variant label values for PMIP4 experiments



PMIP4-CMIP6 directory structure and file names

The *DRS* defines (among other things) how the different attributes will be combined to generate unambiguous directories and file names, in the ESGF distributed database

For PMIP4, we have sub_experiment_id == none (because we don't use forecast and hindcast), and therefore member_id == variant_label

Last update:	2016	/08/31	15.58

Used in dir?	Used in file?	Attribute name	Value for PMIP4-CMIP6
Y	N	mip_era	CMIP6 PMIP4 ?
Y	N	activity_id	CMIP PMIP Note: "CMIP PMIP" becomes CMIP (If multiple activities are listed in the global attribute, the first one is used in the directory structure)
Y	N	institution_id	institution label (IPSL,)
Y	N	version	vYYYYMMDD (e.g., v20160218), indicating a representative date for the version Note: the <i>version</i> is not stored in the NetCDF files and not used in the file names, because it is only specified when <i>publishing</i> (eg storing the data in ESGF) the NetCDF files
Y	Y	source_id	source label (e.g. the model name/version using only authorized characters)
Y	Y	experiment_id	See the Experiment names section
Y	Y	member_id	PMIP4 does not use sub_experiment_id, so the value of member_id is equal to the variant_label: r <k>i<l>p<m>f<n> (see the CMIP6 variant label section)</n></m></l></k>
Y	Y	table_id	CMOR table label (Amon,)
Y	Y	variable_id	variable identifier (tas, pr,)
Y	Y	grid_label	gn: output is reported on the native grid gr: output is regridded by the modeling group to a "primary grid" of its choosing gr1, gr2,: output is regridded on another grid than the primary grid (that was already different from the native grid)
N	Y	time_range	the last segment of the file name indicates the time-range spanned by the data in the file, and is omitted when inappropriate. The format for this segment is the same as in CMIP5

Examples:

- Directory = CMIP6/CMIP/NCAR/CCSM2-1/1pctC02/r1i1p1f1/Amon/tas/gn/v20150320/ File = tas Amon CCSM2-1 1pctC02 r1i1p1f1 gn 202001-202912.nc
- Directory = CMIP6/DCPP/NCAR/CCSM2-1/dcppA-hindcast/s1960r1i2p1f1/Amon/tas/gr/v20150320/
 File = tas_Amon_CCSM2-1_hindcast_s1960-r1i2p1f1_gn_198001-198412.nc

From:

https://pmip4.lsce.ipsl.fr/ - PMIP4

Permanent link:

https://pmip4.lsce.ipsl.fr/doku.php/database:drs?rev=1472651935

Last update: 2016/08/31 15:58

